

# GAME FENCE - FIXED KNOT

This high-tensile fence has the same fixed knot as the livestock fence, and is available in many configurations up to eight feet tall. This taller fence is ideal for deer, elk and other animals that are capable of jumping over the livestock fence. The eight foot version of this fence is commonly used alongside highways to prevent animals from accessing roadways.

The spacing of the line wires can be narrower at the bottom to keep smaller animals in or out of the fenced area. The spacing increases in size towards the top of the fence for larger animals.


The Class 3 galvanized coating lasts up to 25 years. Game fence is available in many sizes and wire spacing options. Meets ASTM A116 requirements.



## WIRE SPECIFICATIONS

Wire	Diameter (inch)	Tensile (ksi)	Minimum Breaking Strength	Minimum Zinc Coating
Line Wire	0.099 ± 0.005	175 min	1,360 lb	0.85 oz zinc per sq ft
Stay Wire	0.099 ± 0.005	125 min	960 lb	0.85 oz zinc per sq ft
Knot Wire	0.092 ± 0.005	60 min	350 lb	0.85 oz zinc per sq ft

# GAME FENCE - FIXED KNOT

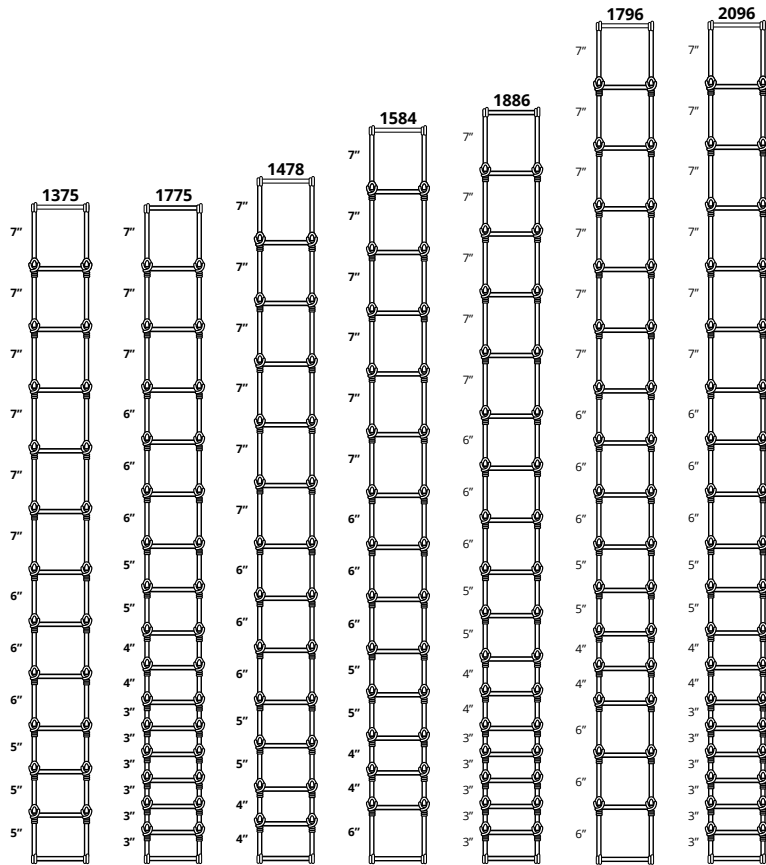

## GAME FENCE - FIXED KNOT

Item #	Style	Height	# Line Wires	Vertical Spacing	Wire Gauge	Roll Length	Roll Weight (lb)	Rolls/Pallet	UPC
33122	1375-6-12½	75"	13	6"	12½	330'	269	6	95832331224
33422	1375-6-12½	75"	13	6"	12½	500'	418	4	95832334225
33322	1375-12-12½	75"	13	12"	12½	660'	377	4	95832333228
33513	1775-3-12½	75"	17	3"	12½	165'	253	6	95832335130
33113	1775-6-12½	75"	17	6"	12½	330'	337	6	95832331132
33213	1775-12-12½	75"	17	12"	12½	330'	243	6	95832332139
33463	1775-12-12½	75"	17	12"	12½	500'	364	6	95832334638
33527	1478-6-12½	78"	14	6"	12½	165'	146	8	95832335277
33127	1478-6-12½	78"	14	6"	12½	330'	294	6	95832331279
33120	1584-6-12½	84"	15	6"	12½	330'	309	1	95832331200
33114	1886-6-12½	86"	18	6"	12½	330'	367	1	95832331149
33115	1796-6-12½	96"	17	6"	12½	330'	367	4	95832331156
33215	1796-12-12½	96"	17	12"	12½	330'	258	4	95832332153
33116	2096-6-12½	96"	20	6"	12½	330'	402	4	95832331163
33416	2096-6-12½	96"	20	6"	12½	500'	620	1	95832334164
33216	2096-12-12½	96"	20	12"	12½	330'	292	4	95832332160
33316	2096-12-12½	96"	20	12"	12½	660'	583	1	95832333167

CLASS 3