

# LIVESTOCK FENCE - FIXED KNOT

This high-tensile, fixed-knot fence is ideal for containing large, strong animals such as bison and bulls. The vertical stay wires are secured in place to the line wires with a knot made from an additional wire. It is an extremely strong livestock fence that resists stretching and sagging due to contact from animals inside and outside of the fence, resulting in fewer posts needed during installation.

The spacing of the line wires can be narrower at the bottom to keep smaller animals in or out of the fenced area. The spacing increases in size towards the top of the fence for larger animals.


The Class 3 galvanized coating lasts up to 25 years. Livestock fence is available in many sizes and wire spacing options. Meets ASTM A116 requirements.



## WIRE SPECIFICATIONS

Wire	Diameter (inch)	Tensile (ksi)	Minimum Breaking Strength	Minimum Zinc Coating
Line Wire	0.099 ± 0.005	175 min	1,360 lb	0.85 oz zinc per sq ft
Stay Wire	0.099 ± 0.005	125 min	960 lb	0.85 oz zinc per sq ft
Knot Wire	0.092 ± 0.005	60 min	350 lb	0.85 oz zinc per sq ft

# LIVESTOCK FENCE - FIXED KNOT

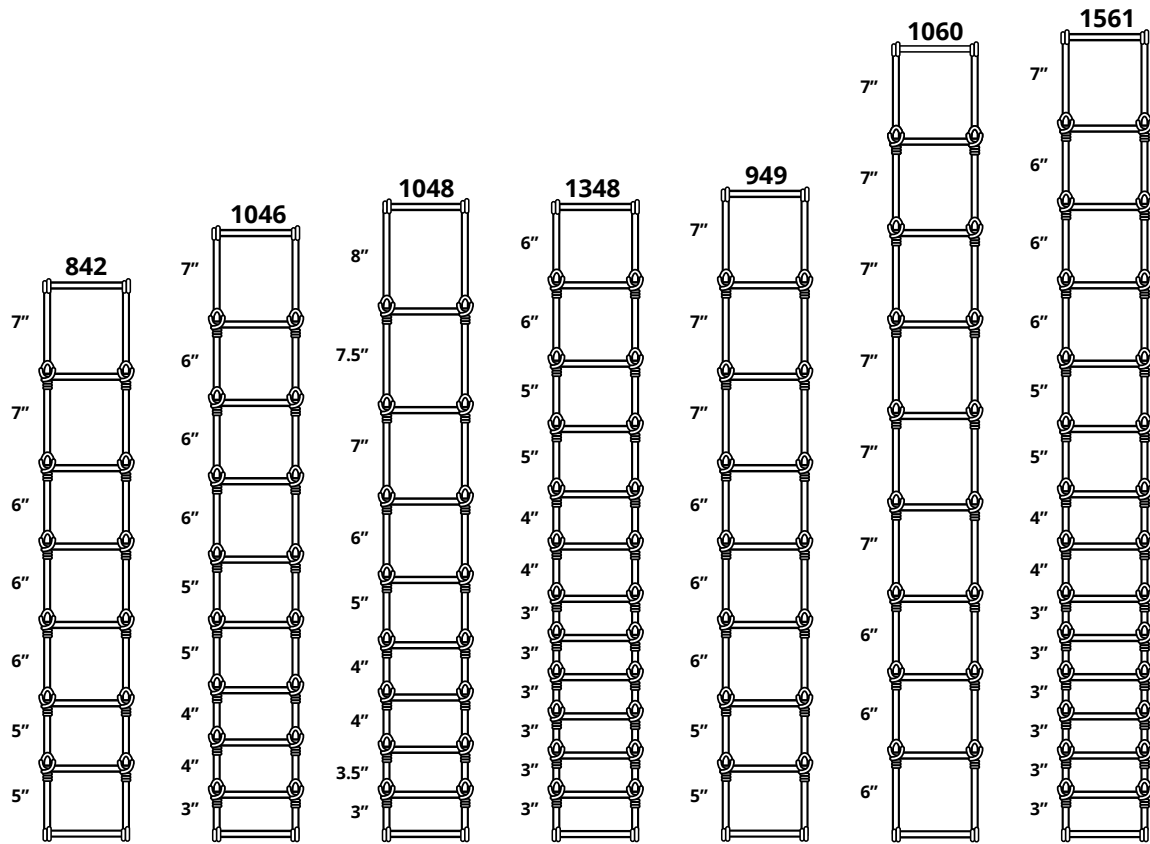

## LIVESTOCK FENCE - FIXED KNOT

Item #	Style	Height	# Line Wires	Vertical Spacing	Wire Gauge	Roll Length	Roll Weight (lb)	Rolls/Pallet	UPC
33119	842-6-12½	42"	8	6"	12½	330'	158	6	95832331194
33219	842-12-12½	42"	8	12"	12½	330'	117	9	95832332191
33319	842-12-12½	42"	8	12"	12½	660'	233	6	95832333198
33126	1046-6-12½	46"	10	6"	12½	330'	194	6	95832331262
33211	1048-12-12½	48"	10	12"	12½	330'	142	9	95832332115
33517	1348-3-12½	48"	13	3"	12½	200'	219	4	95832335178
33117	1348-6-12½	48"	13	6"	12½	330'	243	6	95832331170
33217	1348-12-12½	48"	13	12"	12½	330'	176	1	95832332177
33110	949-6-12½	49"	9	6"	12½	330'	181	6	95832331101
33210	949-12-12½	49"	9	12"	12½	330'	133	9	95832332108
33310	949-12-12½	49"	9	12"	12½	660'	266	6	95832333105
33111	1060-6-12½	60"	10	6"	12½	330'	217	6	95832331118
33411	1060-6-12½	60"	10	6"	12½	500'	321	4	95832334119
33311	1060-12-12½	60"	10	12"	12½	660'	305	4	95832333112
33518	1561-3-12½	61"	15	3"	12½	200'	264	4	95832335185
33118	1561-6-12½	61"	15	6"	12½	330'	289	6	95832331187
33218	1561-12-12½	61"	15	12"	12½	330'	210	1	95832332184

CLASS 3